

AM15EB RF - battery motor




AM15EB RF

- Built-in rechargeable battery
- Compatible with all types of Torro controls
- Low energy usage
- Overload and high temperature switch
- Up to four months battery life (with 1 open-close per day)
- Charging with Micro USB cable

PARAMETERS

	AM15EB RF
Torque [Nm]	0,3
Revolutions per minute [rpm]	35
Voltage	5V DC
Power consumption [A]	0,8
Power [W]	4,0
Diameter [mm]	15,5
Length [mm]	355
Silent run	
Built-in radio receiver	●
Electronic limit setting	●
Potential-free	
Limits (main intermediate)	2 4
IP protection class	IP44
Working temperature	-10 ÷ 60 °C
Cable length [m]	-

DIMENSIONS

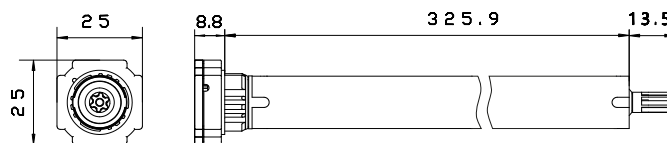

POWER*



Charger
AM15-CH



Micro USB cable (3 m)
AC899-01

* We recommend using a dedicated charger (AM15-CH) or other according to the recommended parameters - 5V / 0,5A. Using a charger with other parameters may have a negative impact on the motor battery life. Damage resulting from improper engine charging is not subject to warranty claim.