


Boundary dimensions for fabrics below 230 g/m²					Boundary dimensions for fabrics over 230 g/m²					System colours		
Controls	MIN	MAX	MAX	m²	Controls	MIN	MAX	MAX	m²			
Chain ø30/ø35	40	200	300	5,0	Chain ø30/ø35	40	200	260	4,5			
Motor DC ø28	41	180	260	4,5	Motor DC ø28	41	170	240	4,0			
Tube ø35 > 140 cm width					Tube ø35 > 120 cm width							

Price in the table includes blind in white cassette, controlled by plastic chain.

Two types of aluminium side guides are available:
type A - universal installation
type B - recess installation

Two types of bottom bars are available:
type F - used in roller blinds without side guides
type G - used in roller blinds with side guides


Dimensions

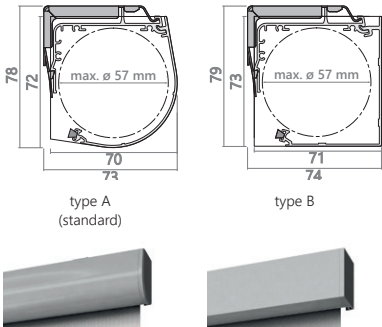


Brackets



System dimensions

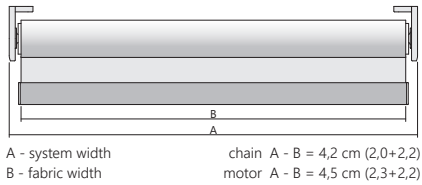


Bottom bar

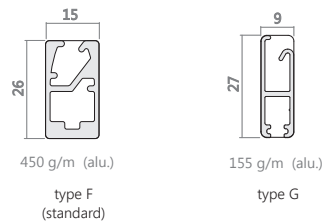


Side guidance




Tension brackets

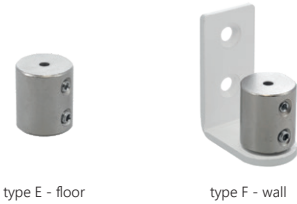

Side guides

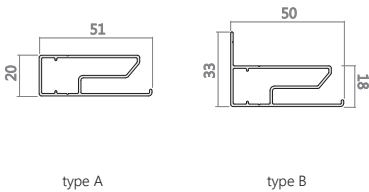

Duo-Link

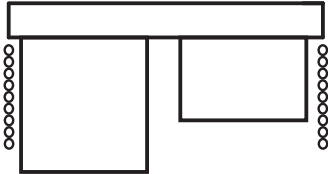

Total price is sum of two individual blinds.
The distance between fabrics is about 2,3 cm.