






Boundary dimensions for fabrics below 230 g/m ²					Boundary dimensions for fabrics over 230 g/m ²					System colours			
Controls	MIN	MAX	M A X	m ²	Controls	MIN	MAX	M A X	m ²				
Chain	50	300	400	9,0	Chain	50	280	350	7,0	white	black	grey	anthracite
Chain (installation prof.)	50	300	400	9,0	Chain (installation prof.)	50	280	330	7,0				
Motor	54	320	380	9,0	Motor	54	300	350	8,0				
Motor (installation prof.)	54	320	380	9,0	Motor (installation prof.)	54	300	330	8,0				


Tube ∅50 > 260 cm width

Tube ∅50 > 240 cm width

 Price in the table includes blind with: plastic chain control and bottom bar type C.




System dimensions

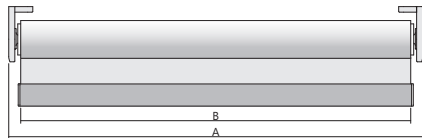

A - system width
B - fabric width
chain A - B = 4,0 cm (2,3 + 1,7)
motor A - B = 4,6 cm (2,9 + 1,7)

Brackets

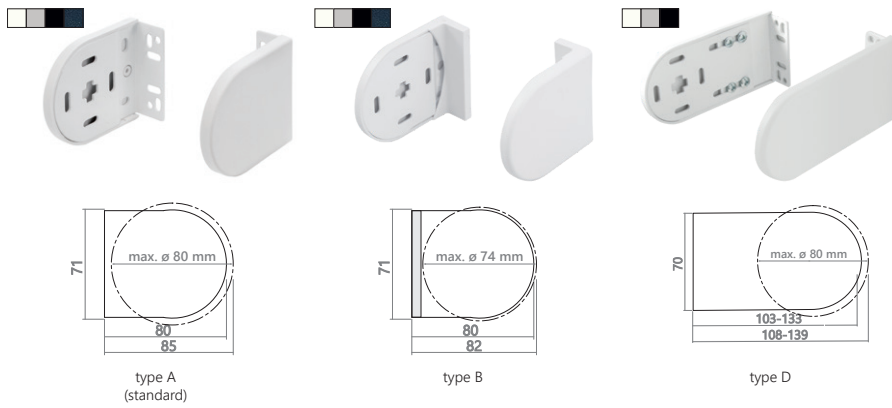


Installation profile



Roller blind is delivered with brackets attached to the installation profile.
Option not available in anthracite colour.
Option offered with surcharge.


Profile dimensions




Profile brackets



Bottom bar



Multi-Link




Total price is the sum of prices of individual blinds.
The distance between fabrics is about 2,1 cm.
Middle bracket is available only in white colour.

Side guidance



Blind equipped with a perlon coated steel wire.
Option offered with surcharge.

Tension brackets




Boundary dimensions Multi-Link

Controls	2 blinds		3 blinds		Fabric weight
	MAX	m ²	MAX	m ²	
Chain	600	9,0	900	9,0	< 230 g/m ²
	560	7,0	840	7,0	≥ 230 g/m ²
Motor AC	640	15,0	960	24,0	< 230 g/m ²
	600	13,0	900	13,0	≥ 230 g/m ²

* The possibility to produce roller blind with bigger dimensions is possible after consultation.

Duo-Link



Total price is sum of two individual blinds.
The distance between fabrics is about 2,1 cm.
Middle bracket is available only in white colour.